

Doboy Conveyors & Compression Units

MD Conveyor

SINGLE BELT, MEDIUM-DUTY CONVEYOR

The Doboy MD Conveyor supports standard size bags as they are transported through the sealing machine. The conveyor comes standard with stainless steel construction and is offered in lengths ranging from 2.4–3.6 m (8–12'). The MD conveyor can be mounted to the floorstand of any Doboy sealer and comes standard with control integration allowing speed adjustments and start/stop the conveyor directly from the sealer.



FEATURES

- Standard belt widths: 254 mm (10") or 508 mm (20") for larger bags
- VFD drive
- Standalone enclosure for the conveyor for use with multiple machines (optional – if chosen to not integrate with sealer)
- Conveyor docking station keeps sealer and conveyor in precise alignment, even while being transported



MD conveyor integrated with a horizontal continuous band sealer.

Compression Unit

CONVEYOR ACCESSORY

The Doboy Compression Units are used in conjunction with a support conveyor and sealer to remove air from a package prior to being sealed. This can help ensure freshness of a product, longer shelf-life, increased package appearance, and slimmer packages for increased shipping efficiency.




FEATURES

- Segmented foam belt for gentle product contact
- Belt width 305 mm (12")
- Adjustable height for flexibility with different packages
- Independent variable-speed drive
- Easily integrated with Doboy Single Belt Conveyors



Compression unit integrated with MD conveyor and continuous band sealer for medical pouch application.

Packaging Line Structure.

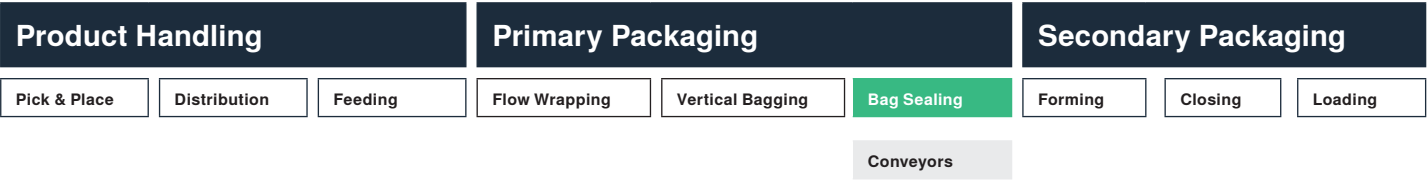

Syntegon Packaging Technology, LLC
869 South Knowles Avenue
New Richmond, WI 54017 USA
Phone +1 715 246 6511
Fax +1 715 246 6539
Mail sales.packaging-nrd@syntegon.com
Web www.syntegon.com

Subject Doboy Conveyors
Date 07.2020
Department PAUD/MKT